


SION

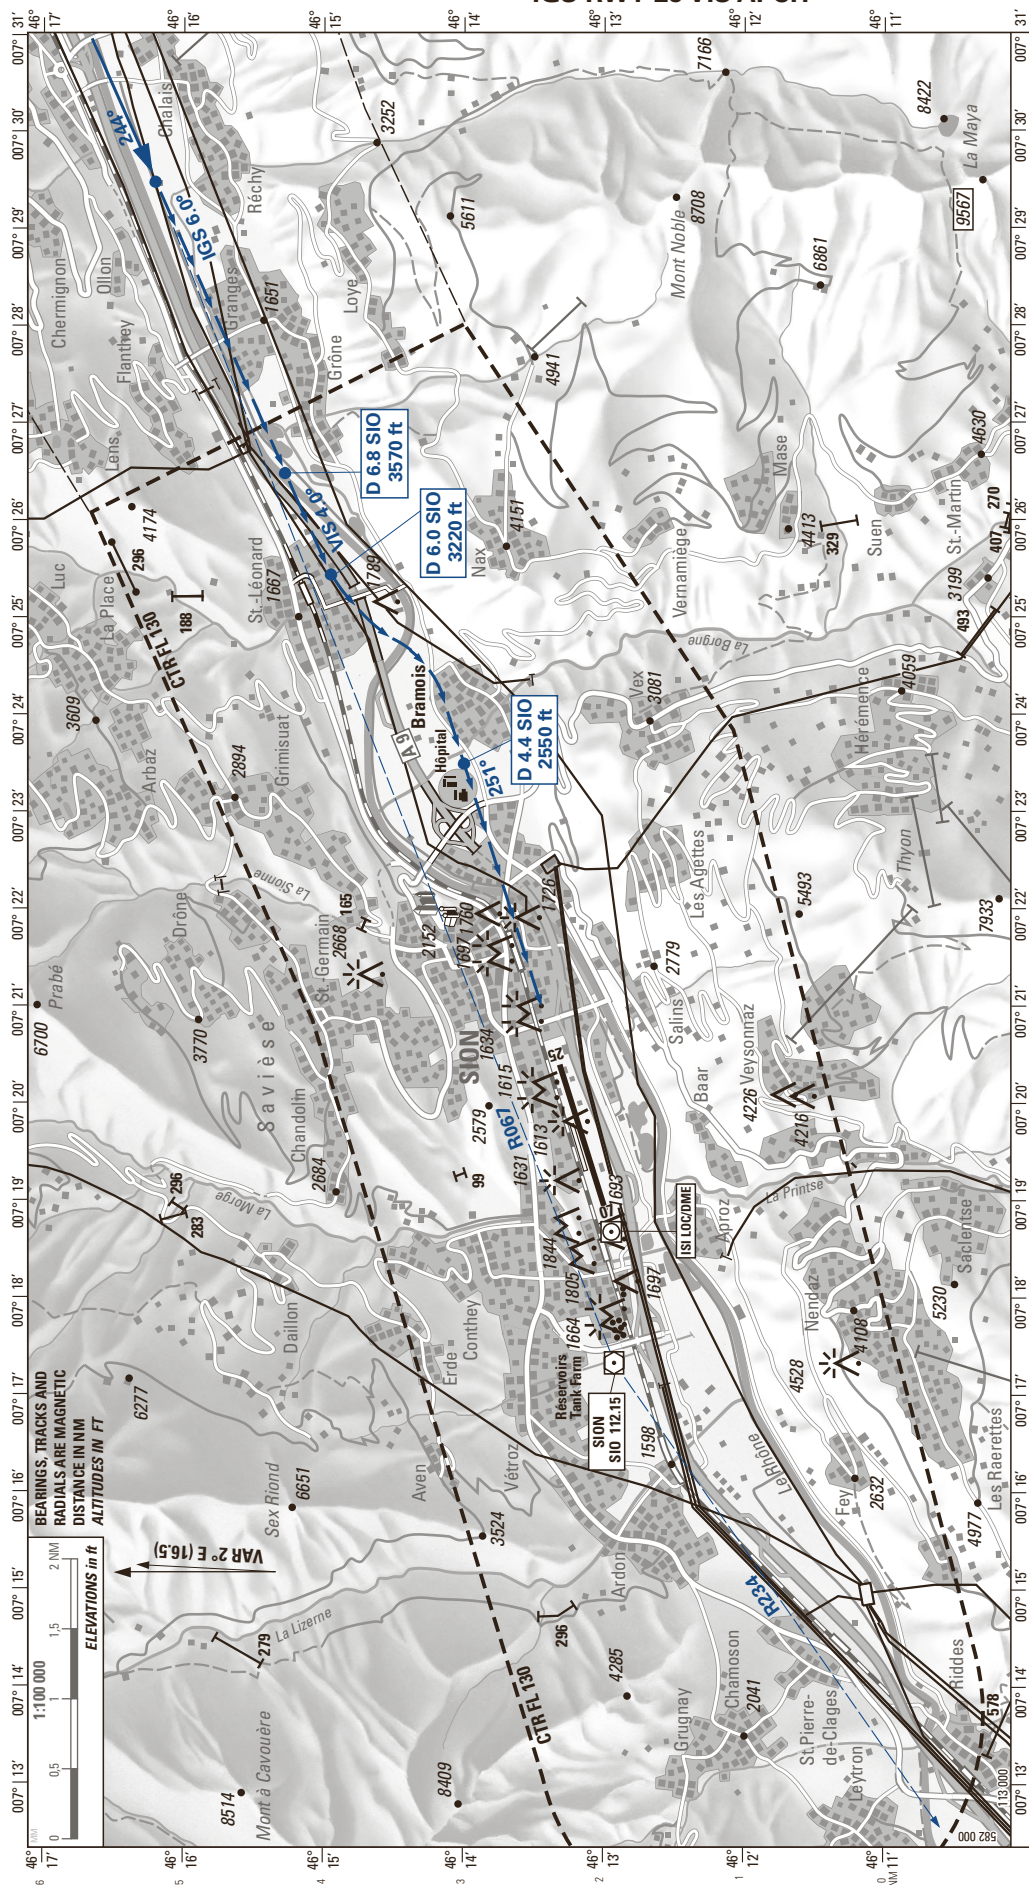

NOTE: The altitudes along the visual approach track are for pilots guidance only. They are calculated with distance and approach angle (4.0°) and do not grant any terrain clearance according to PANS OPS. LOC information unreliable between D0 ISI and D7 ISI, use DME information only.

RMK: PAPI RWY 25 4.0° light beam is offset 5° north from runway axis.

CTN: ICAO obstacle protection surface and PAPI light beam are penetrated by topography starting east of Bramois village (D4.0 ISI).

CORCOR: VAR, RDL, HDG, OBST (VEF 26MAR2020)

© 2020 Swisstopo CH-3084 Wabern.

THIS PAGE INTENTIONALLY LEFT BLANK