


AMDT RECORD		
No.	DATE	ENTERED BY

RWY 05	DECLARED DISTANCES in m	RWY 23
2665	TAKE-OFF RUN AVAILABLE	—
2725	TAKE-OFF DISTANCE AVAILABLE	—
2665	ACCELERATE STOP DISTANCE AVAILABLE	—
—	LANDING DISTANCE AVAILABLE	2665

The graph shows the variation of the slope of the line of best fit for the data in Figure 2. The x-axis represents the slope of the line of best fit (0 to 3500) and the y-axis represents the slope of the line of best fit (400 to 500). The graph shows a series of data points (1, 2, 3, 4, 5) and a dashed line representing the slope of the line of best fit. The slope of the line of best fit is 1.2%.

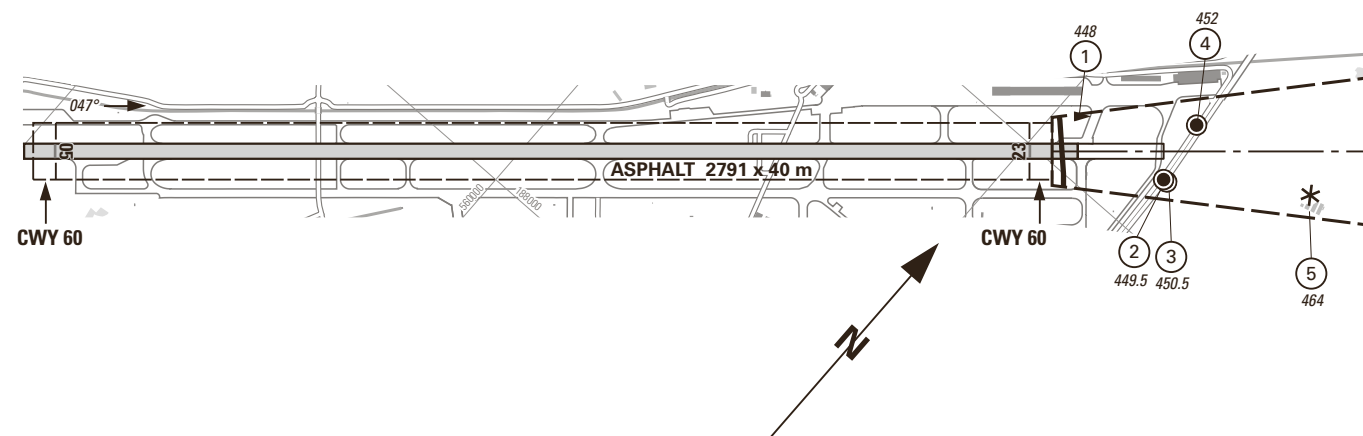

- ① Identification number
- * Tree, shrub
- Pole, tower, spire, antenna, etc.
- ▶ Embankment
- ⤿ Terrain penetrating obstruction plane

ORDER OF ACCURACY ACCORDING TO ICAO REQUIREMENTS

THIS PAGE INTENTIONALLY LEFT BLANK