


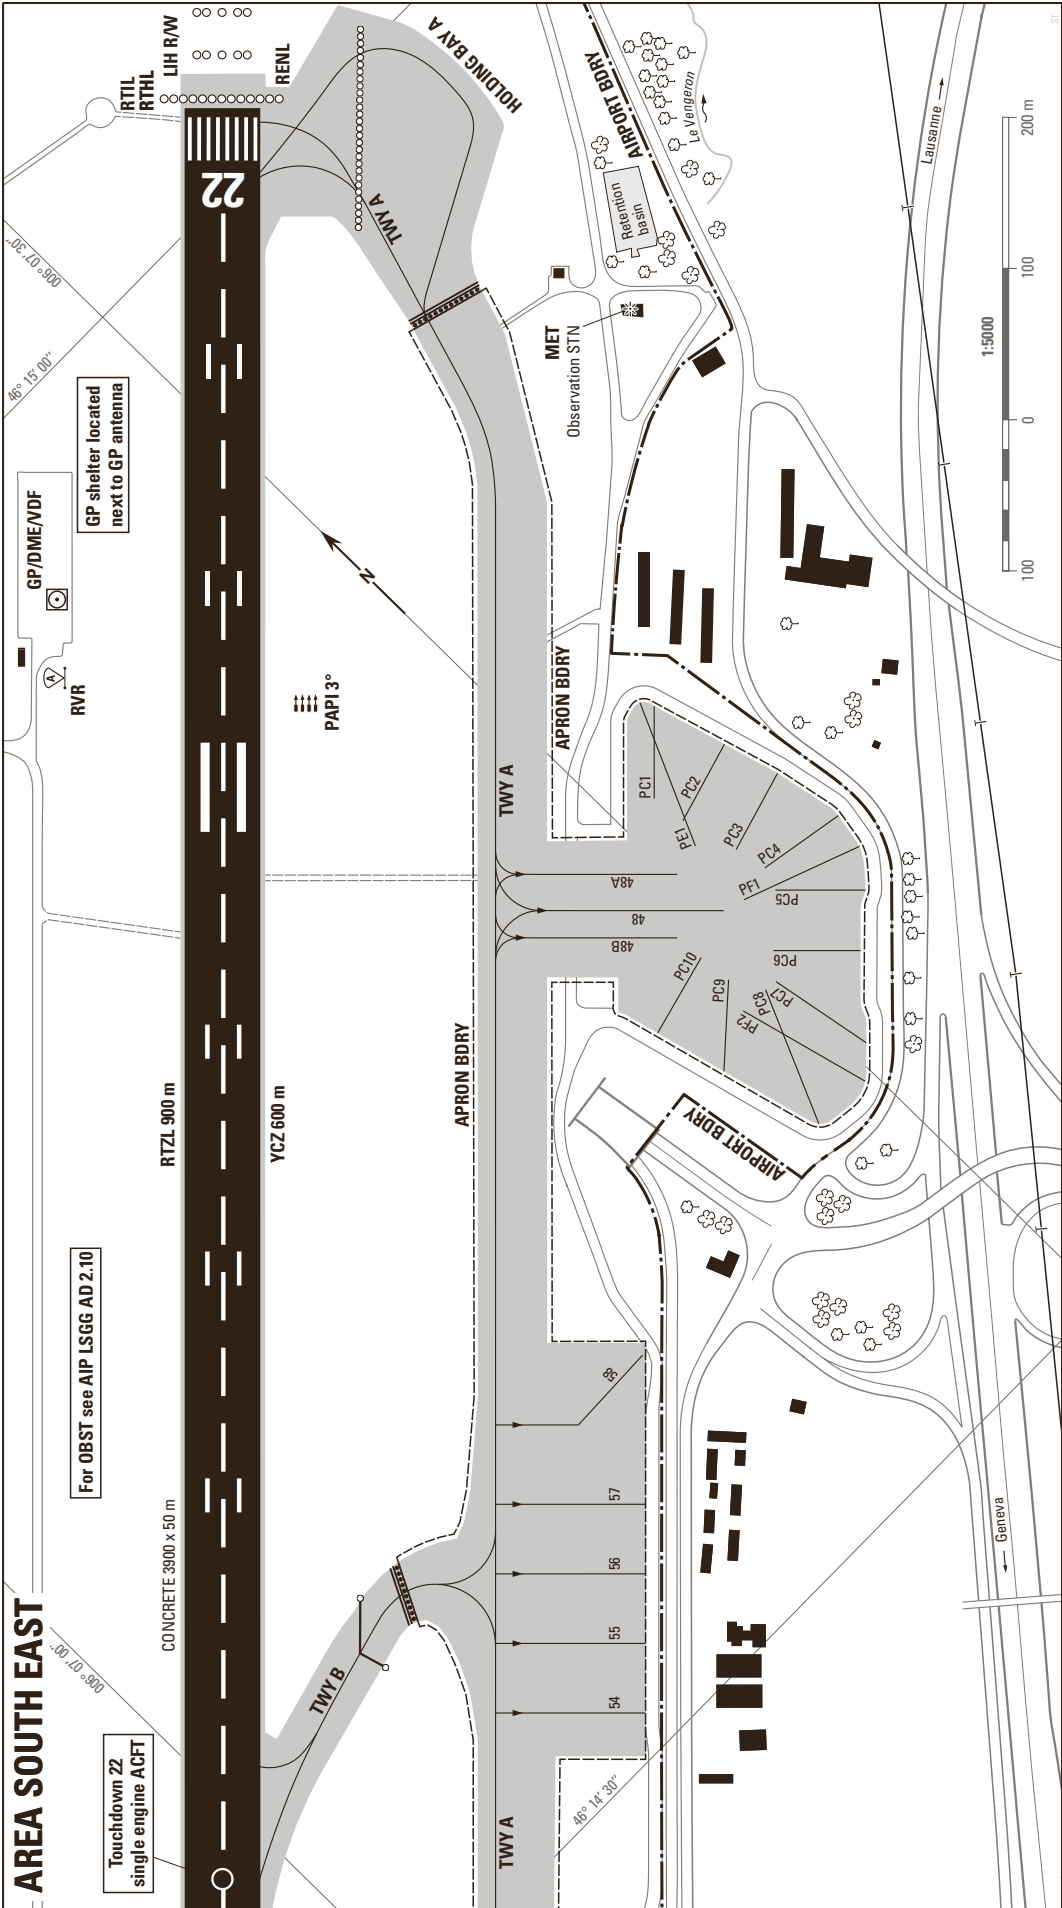

TWY LGT	
EDGE	Apron area, RWY-Exits, TWY curves
CL	A, B, D, E, G, OUTER, INNER, LINK 0, 1, 2, 3, 4, 5 and HLDG bays A and G
RETIL	B, D and E
RLG	A*, B, C, D, E, F, G*, Y, Z - *Across TWY

LEGEND/RMK
Arrivals:
PSN equipped with/without visual docking guidance system $\square$ LSGG AD 2.9
The appropriate stop line - 1, 2 or 3 - at the ACFT stand will be transmitted by Geneva APRON.

Departures:	
Push back procedure $\square$ LSGG AD 2.20	
ATIS	135.580
DEL	121.680
APRON SOUTH	121.855
TWR	118.700

TWY:
— Guideline for taxiing
— HLDG position CAT I
— Stop bar LGT CAT II-III H24
— RWY guard LGT

Taxiways:
On apron, wing tip clearance is provided only if ACFT main gear center remains over the guidelines.
The TWY system south of the RWY fulfils ACFT code letter E operations (MAX wing span 65.0m).
Exceptions and particularities are listed $\square$ AD 2.8 §5.

THIS PAGE INTENTIONALLY LEFT BLANK