

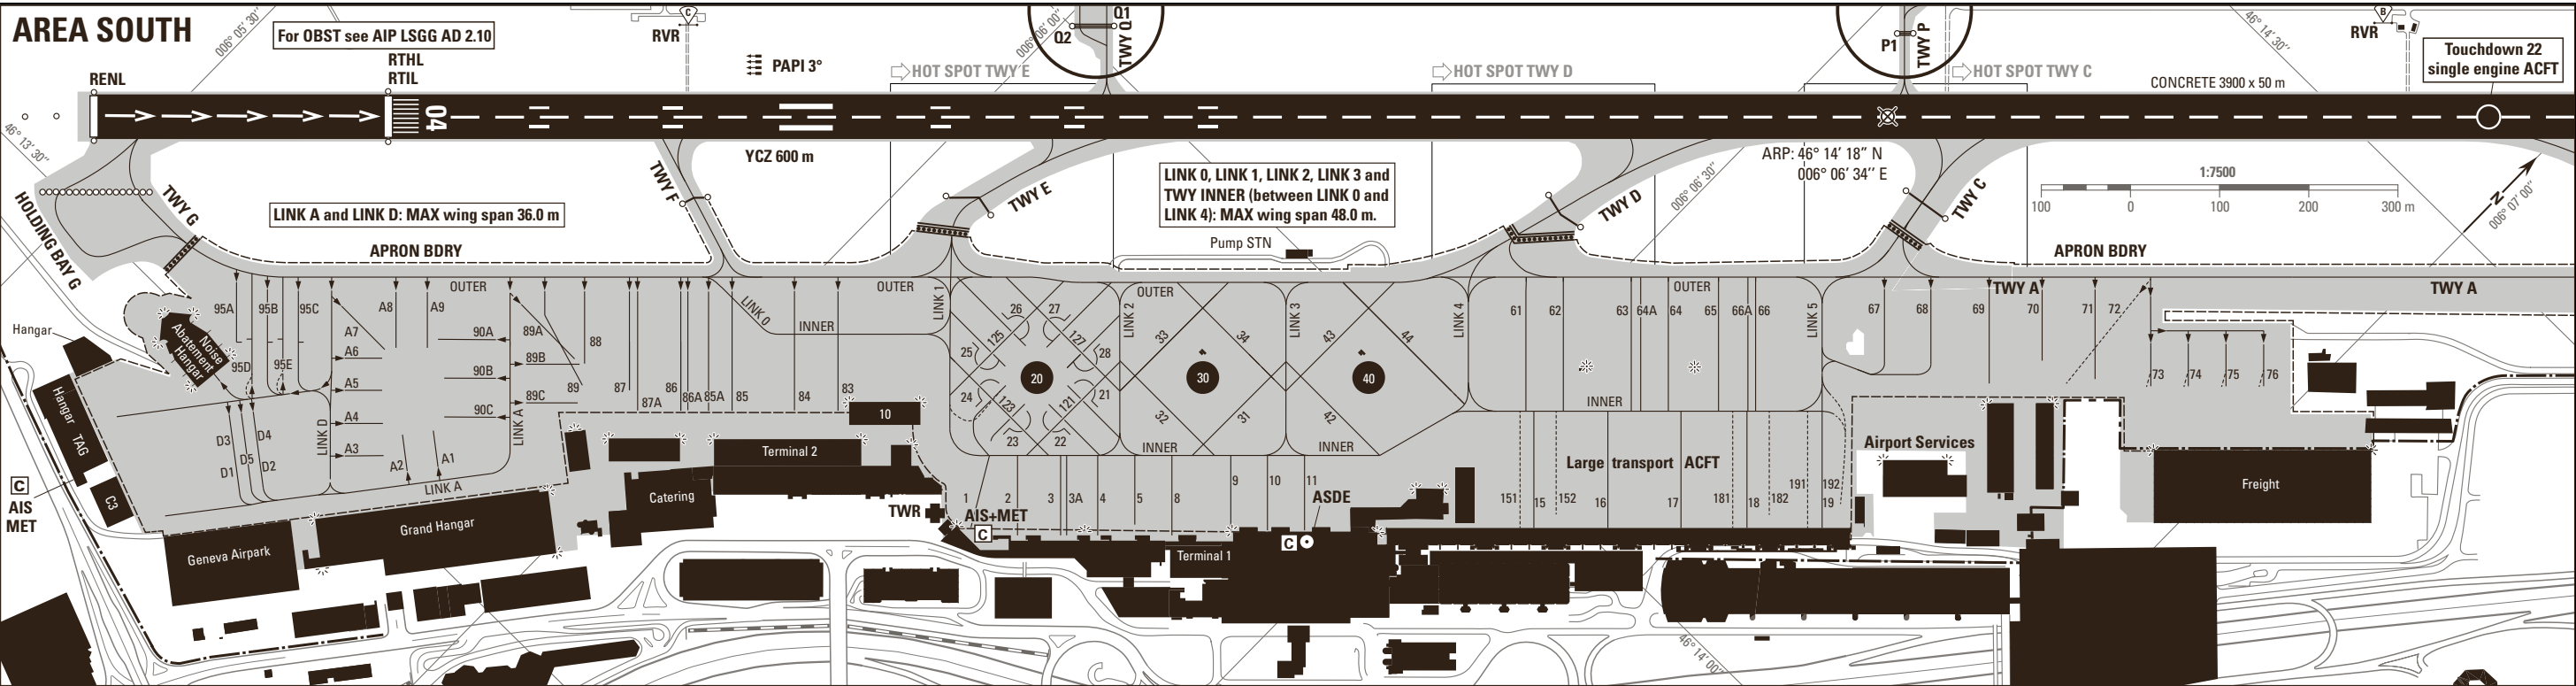
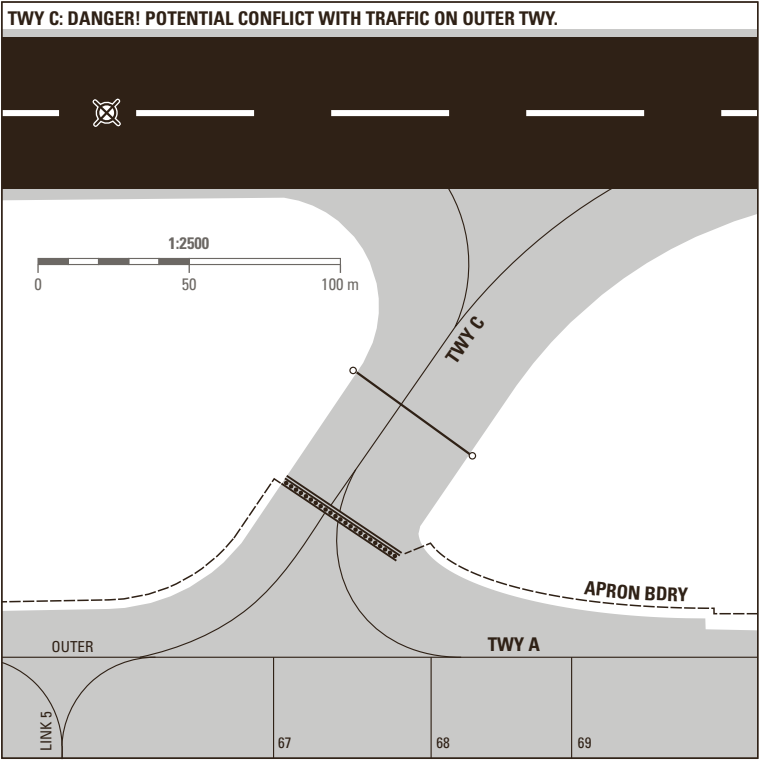


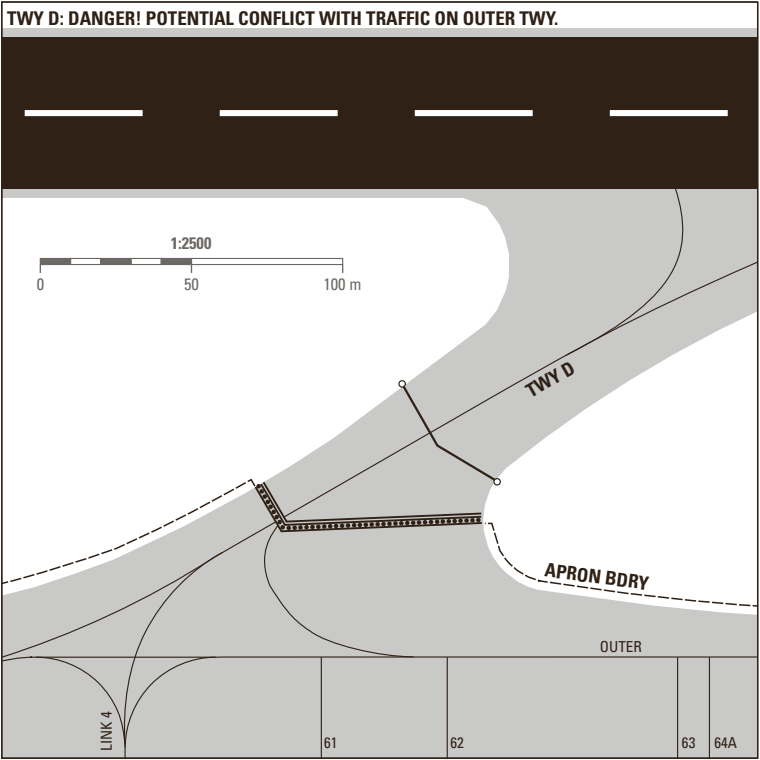

HOT SPOTS

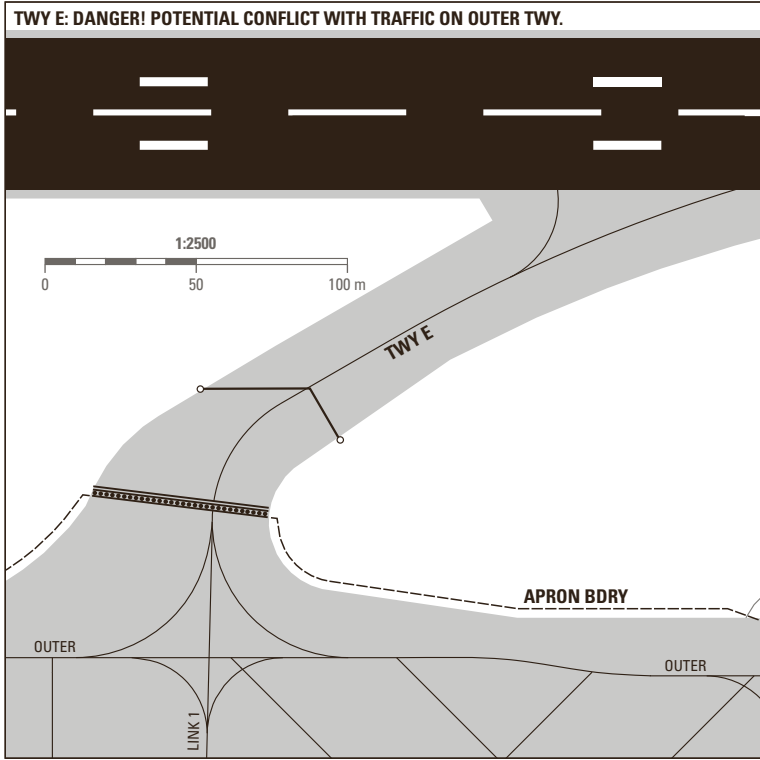

TWY LGT	
EDGE	Apron area, RWY-Exits, TWY curves
CL	A, B, D, E, G, OUTER, INNER, LINK 0, 1, 2, 3, 4, 5, HLDG bays A and G. Partially installed on Q, P, HLDG bays Q and P
RETIL	B, D and E
RGL	A*, B, C, D, E, F, G*, P, Q - *Across TWY

LEGEND/RMK
Arrivals:
PSN equipped with/without visual docking guidance system LSGG AD 2.9
The appropriate stop line - 1, 2 or 3 - at the ACFT stand will be transmitted by Geneva APRON.
Departures:
Push back procedure LSGG AD 2.20

ATIS	135.580
DEL	121.680
APRON SOUTH	121.855
TWR	118.700

RWY Incursion HOTSPOT
ACFT taxiing on TWY Q or P southbound: Be aware of RWY AHEAD.

TWY:
 Guideline for taxiing
 HLDG position CAT I
 Stop bar LGT CAT II-III
 Stop bar LGT CAT I-II-III H24
 Stop bar LGT CAT I-II-III H24
 RWY guard LGT

Taxiways:
On apron, wing tip clearance is provided only if ACFT main gear center remains over the guidelines.
When RWY 22 is in use: ACFT shall not use TWY CHARLIE unless otherwise instructed by TWR. If instructed to vacate via TWY CHARLIE, ACFT shall clear the RWY and hold on TWY CHARLIE remaining clear of OUTER TWY.
The TWY system south of the RWY fulfills ACFT code letter E operations (MAX wing span 65.0 m).
Exceptions and particularities are listed AD 2.8 § 5.

COR: TWY Y/Z renamed to P/Q, HLDG PSN Q1 Q2 P1, Legend (WEF 03OCT2024)

THIS PAGE INTENTIONALLY LEFT BLANK