


VISUAL APPROACH PROCEDURE

ATIS	121.175		
TWR	120.250	119.700	121.500
CLR DEL	121.780		

LUGANO (LSZA)
FOXTROT CIRCLING RWY 19

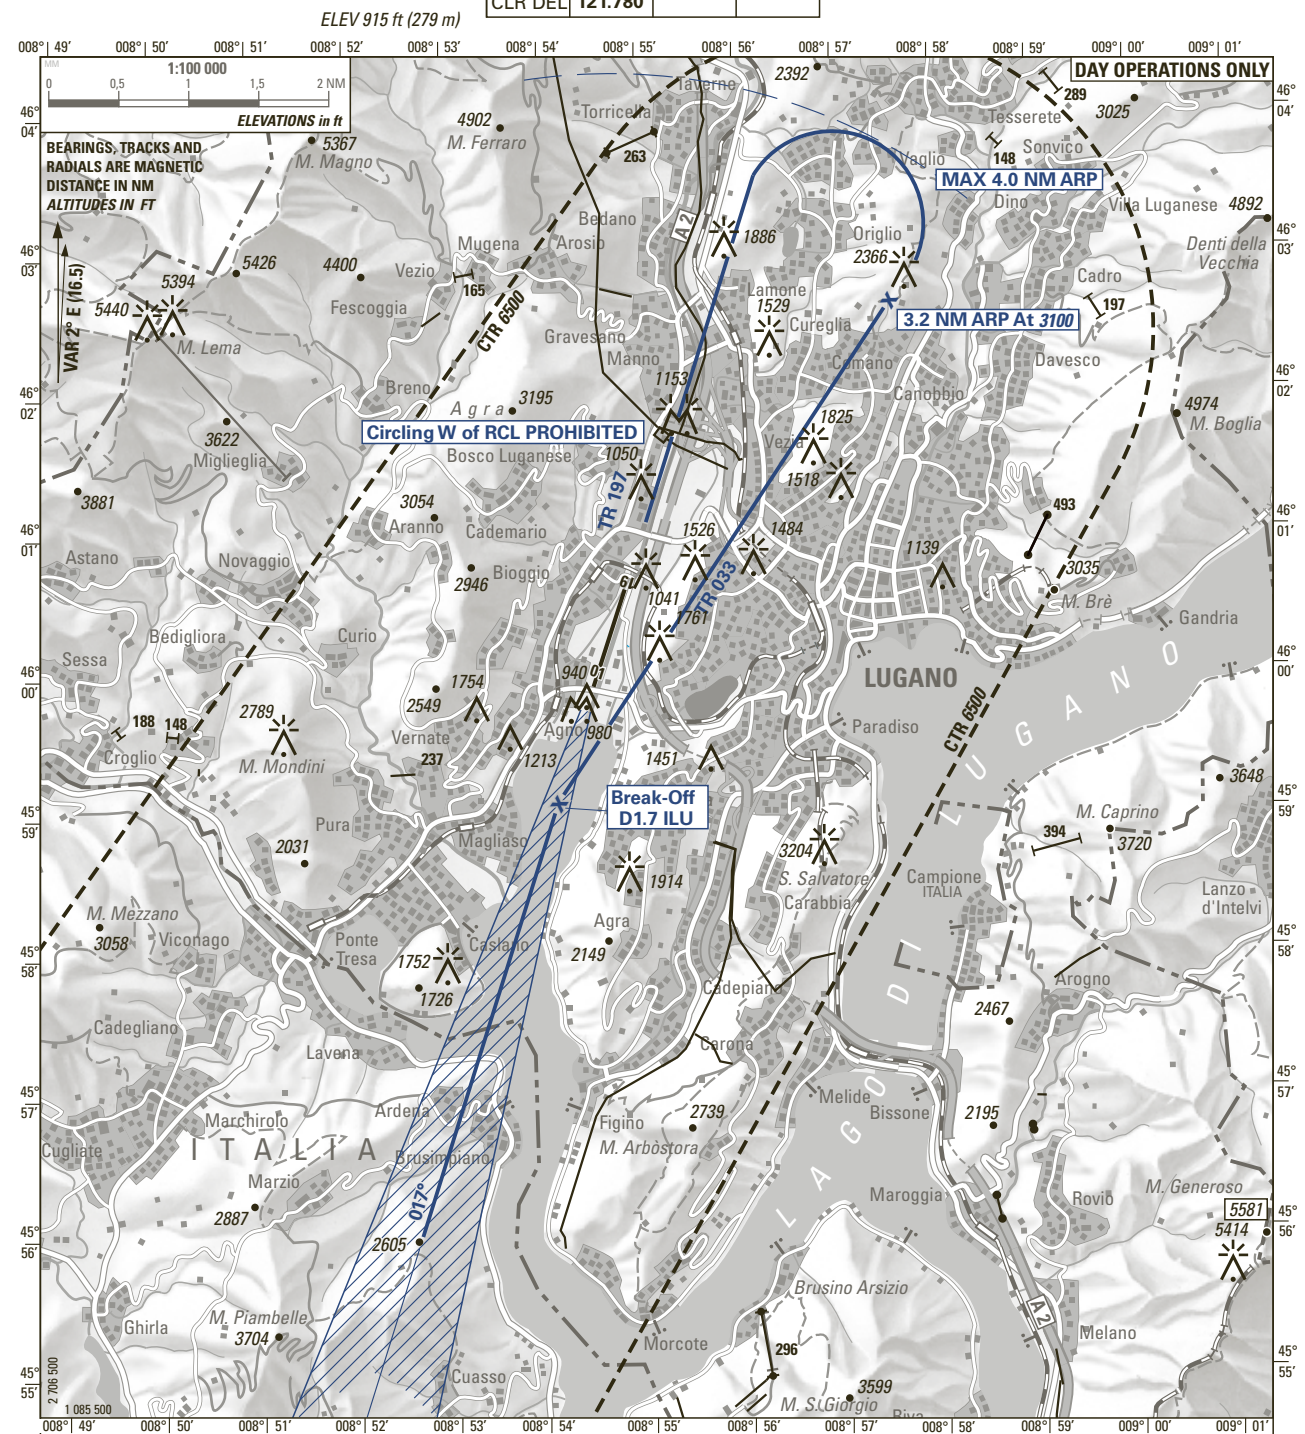

WARNING:Disregard PAPI RWY 01 information.
Use PAPI RWY 19 information only within 2 NM fromTHR

Descent to be arranged to maintain clean configuration as long as possible, safety and ATC requirement considered.

OBST ELEV: ft / HGT: ft

OCA/H CIRCLING	VIS m	CEILING REQUIRED
A & B		
3100 (2185) 3500 (2585) if ceiling and VIS permit	Day only 5000	3100 ft AAL or higher

CIRCLING PROCEDURE

If visual contact is established at D2.2 ILU, continue straight ahead. At D1.7 ILU turn right on track 033°, if ceiling and visibility permit maintain 3500 ft for noise abatement purposes (3100 ft procedure MNM) until 3.2 NM ARP.

At 3.2 NM ARP start left turn onto base.

COR: chart renaming (WEF 23JAN2025)

© swisstopo

THIS PAGE INTENTIONALLY LEFT BLANK