


OMNIDIRECTIONAL DEPARTURE CHART

TRANSITION LEVEL by ATC  
TRANSITION ALTITUDE 7000

GENEVA (LSGG)  
RWY 04/22

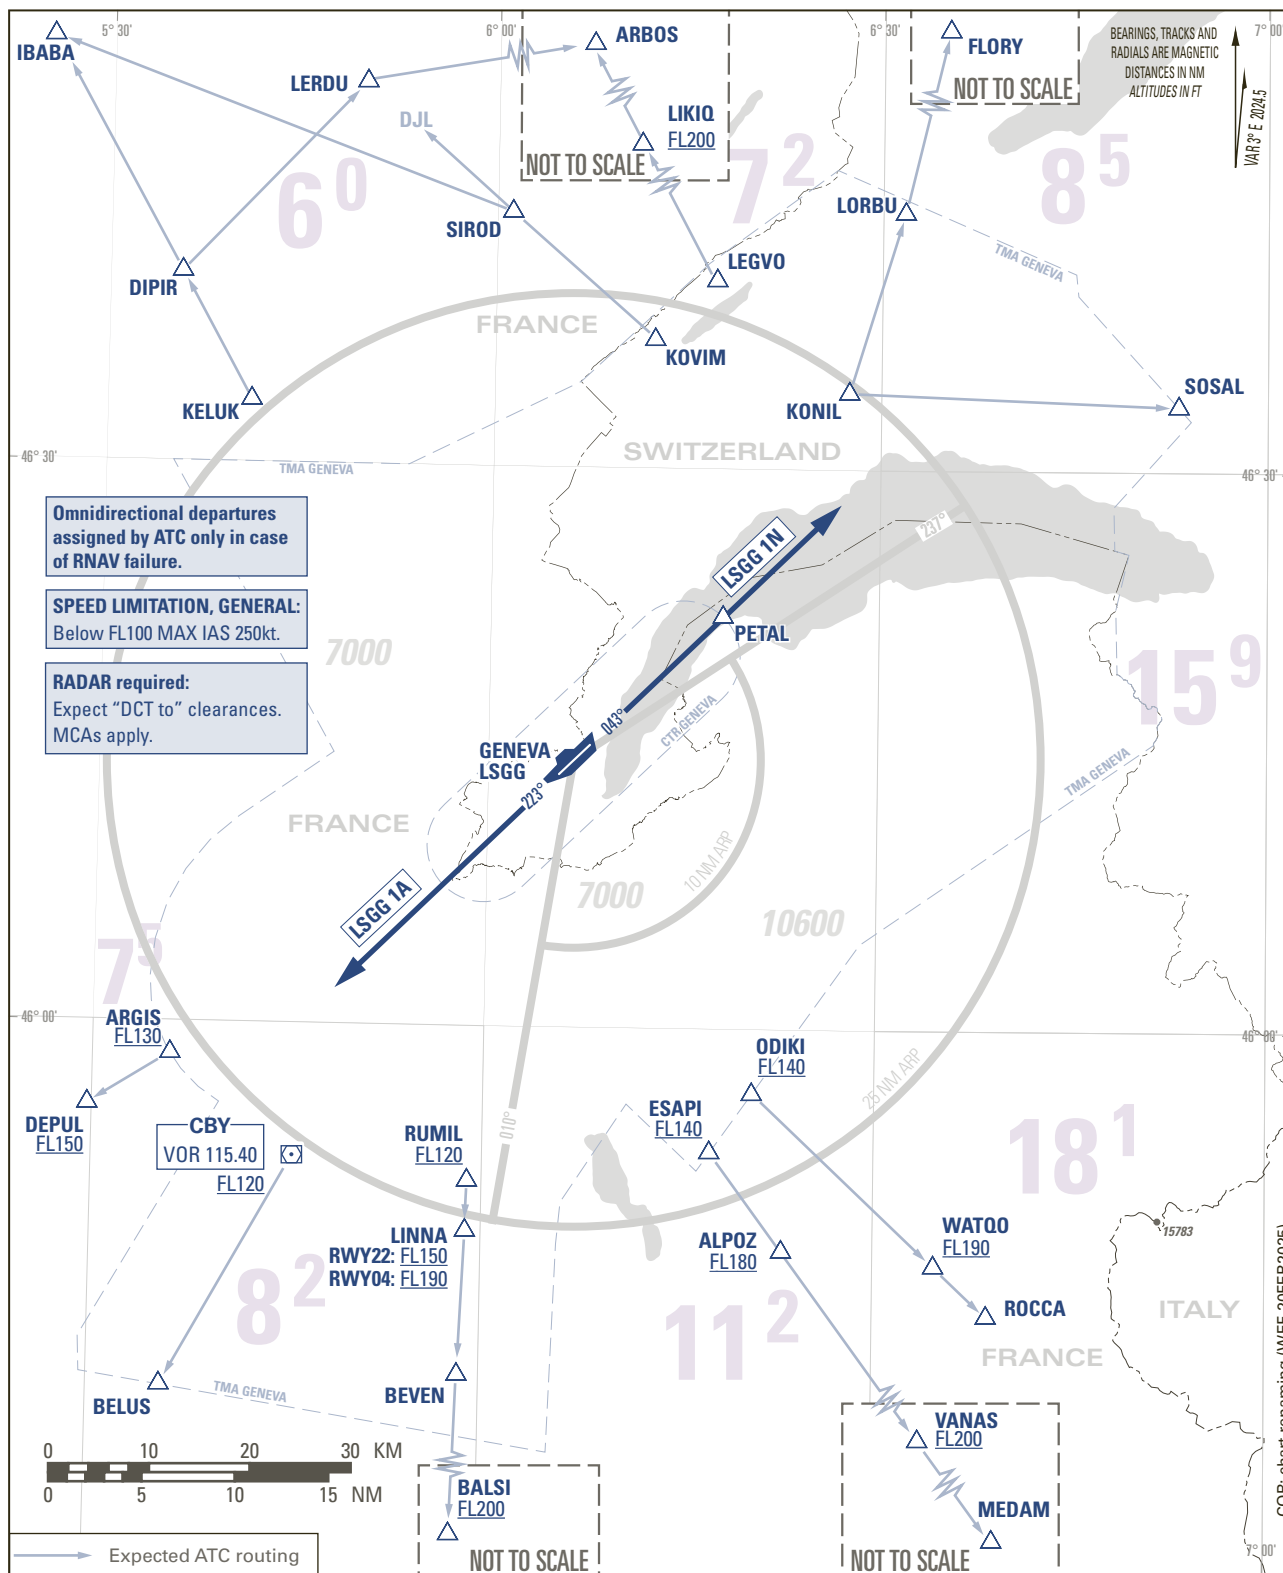

Omnidirectional departures assigned by ATC only in case of RNAV failure.

SPEED LIMITATION, GENERAL:  
Below FL100 MAX IAS 250kt.

RADAR required:  
Expect "DCT to" clearances.  
MCAs apply.

**COMMUNICATION FAILURE PROCEDURE:**

- Set transponder on code 7600.
- Climb to FL090 or last assigned and acknowledged FL.
- Leave last assigned and acknowledged FL earliest three minutes after airborne.
- Continue climb to FPL FL and proceed to first en-route point according to FPL but not below grid AMA.
- For ACFE equipped with onboard telephone, dial +41 22 798 7600 and mention last RTF channel used.

Initial climb clearance: **FL090**

<b>RWY 04: GENEVA ONE NOVEMBER</b> PDG 5.4% to 6100ft.	Climb straight ahead on track 043° to FL090, continue to en-route as cleared by ATC.
<b>RWY 22: GENEVA ONE ALPHA</b> PDG 7.6% to 6200ft.	Climb straight ahead on track 223° to FL090, continue to en-route as cleared by ATC.

**CLOSE-IN OBST:** RWY 04/22 - Trees and poles each side of RWY centre line up to 170ft AGL above DER ELEV (REF AIP LSGG AD 2.10).

**Notes:**

- Strict adherence to initial climb nominal track required for noise abatement.
- For expected ATC routing REF AIP LSGG AD 2.22 §1.1.2.

THIS PAGE INTENTIONALLY LEFT BLANK