


VISUAL APPROACH PROCEDURE

ATIS	121.175		
TWR	120.250	119.700	121.500
CLR DEL	121.780		

LUGANO (LSZA)
FOXTROT CIRCLING RWY 19

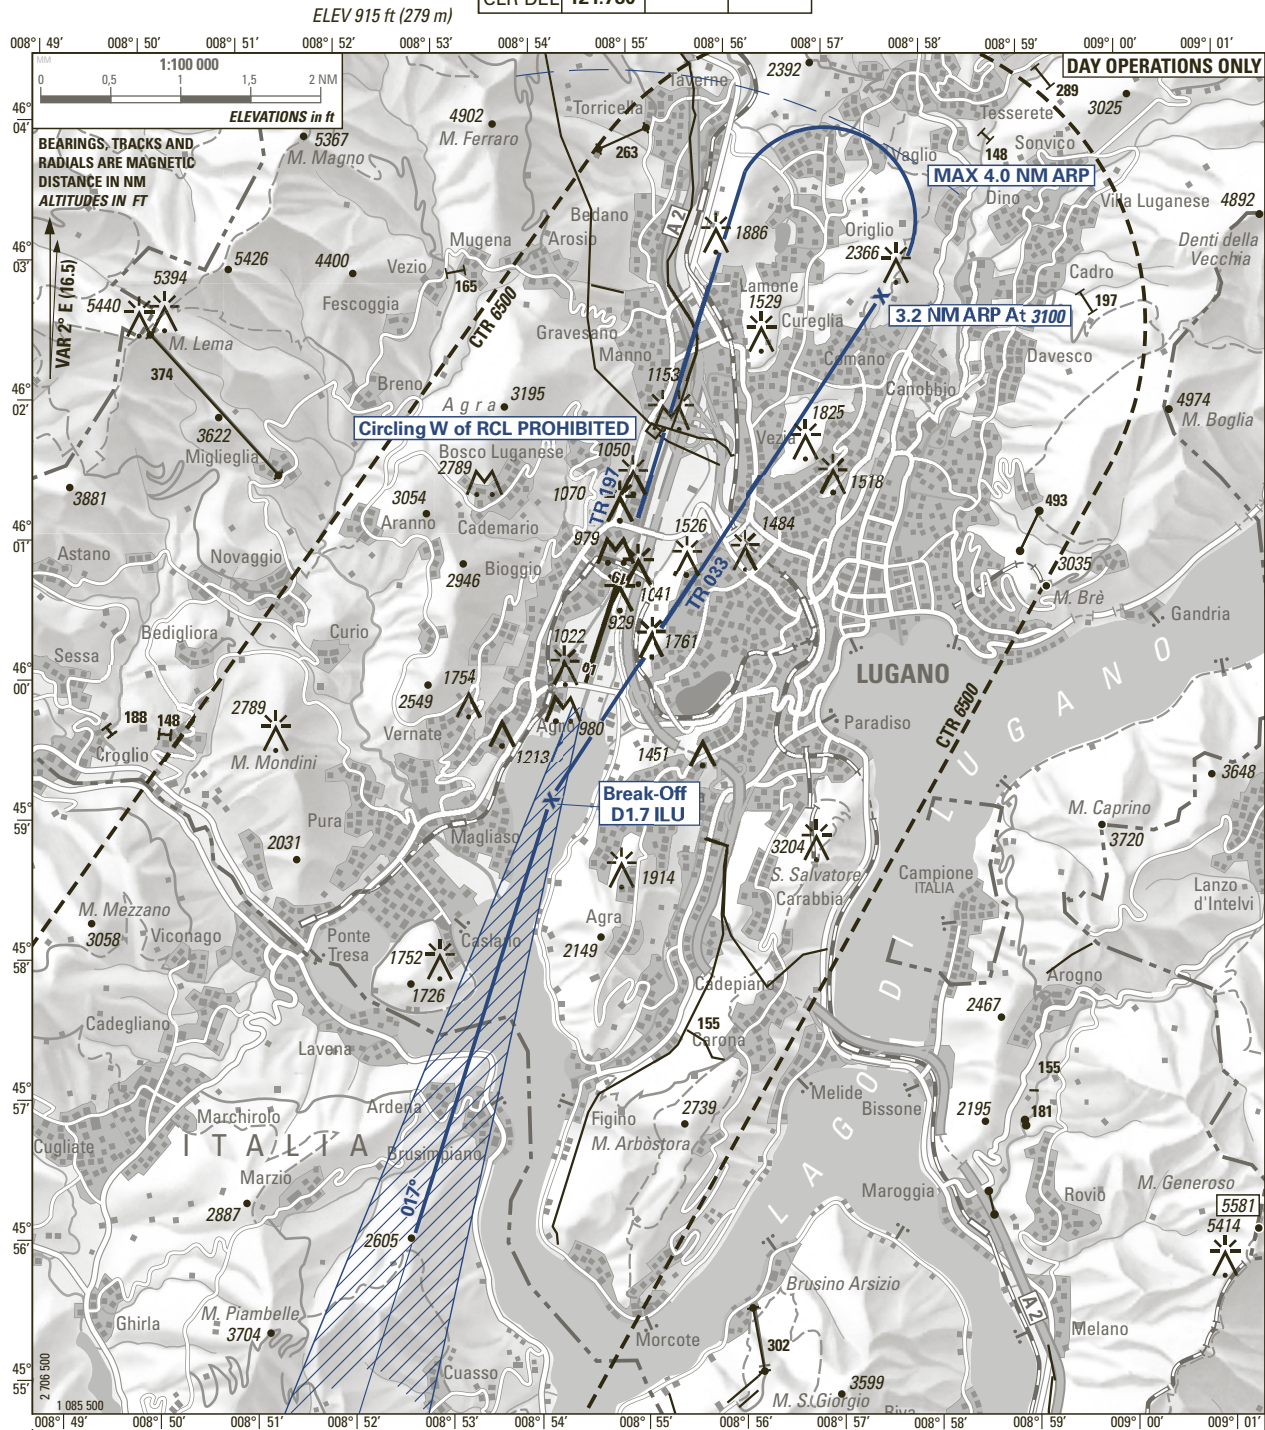

WARNING:Disregard PAPI RWY 01 information.
Use PAPI RWY 19 information only within 2 NM fromTHR

Descent to be arranged to maintain clean
configuration as long as possible, safety and ATC
requirement considered.

OBST ELEV: ft / HGT: ft

OCA/H CIRCLING	VIS m	CEILING REQUIRED
A & B		
3100 (2185) 3500 (2585) if ceiling and VIS permit	Day only 5000	3100 ft AAL or higher

CIRCLING PROCEDURE
If visual contact is established at D2.2 ILU,
continue straight ahead. At D1.7 ILU turn
right on track 033°, if ceiling and visibility
permit maintain 3500 ft for noise abatement
purposes (3100 ft procedure MNM) until
3.2 NM ARP.
At 3.2 NM ARP start left turn onto base.

COR: OBST (WEF 04SEP2025)

© swisstopo

THIS PAGE INTENTIONALLY LEFT BLANK