

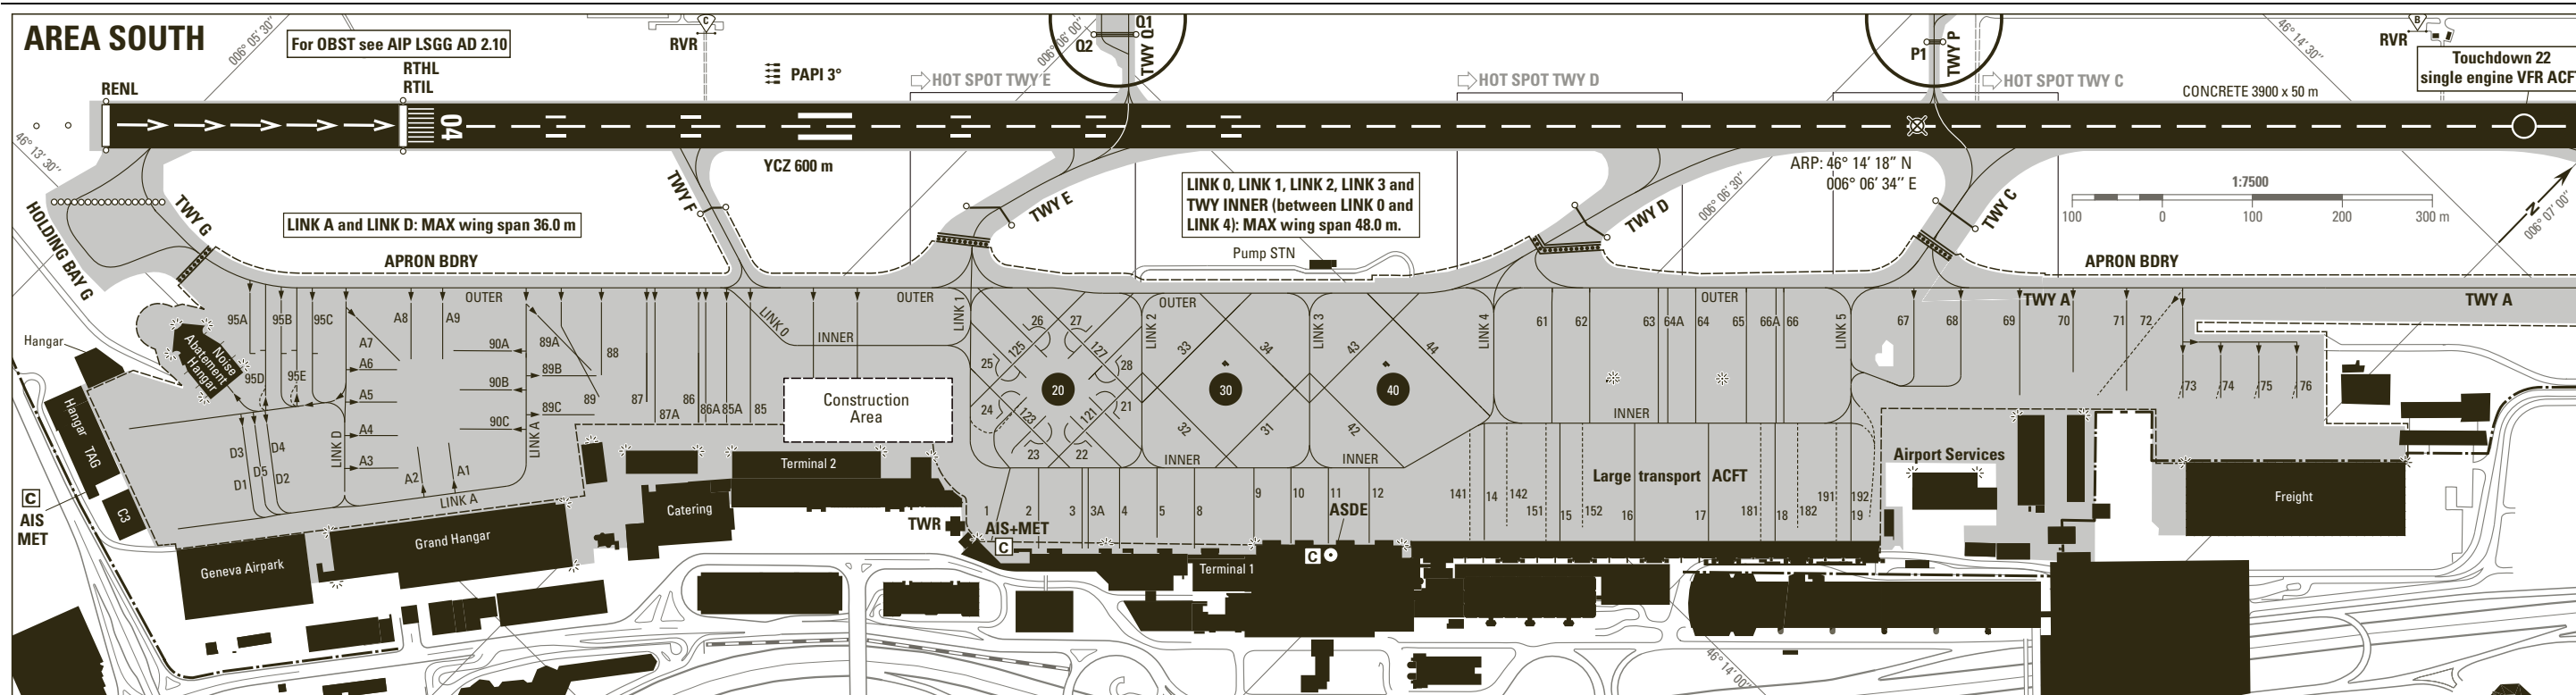
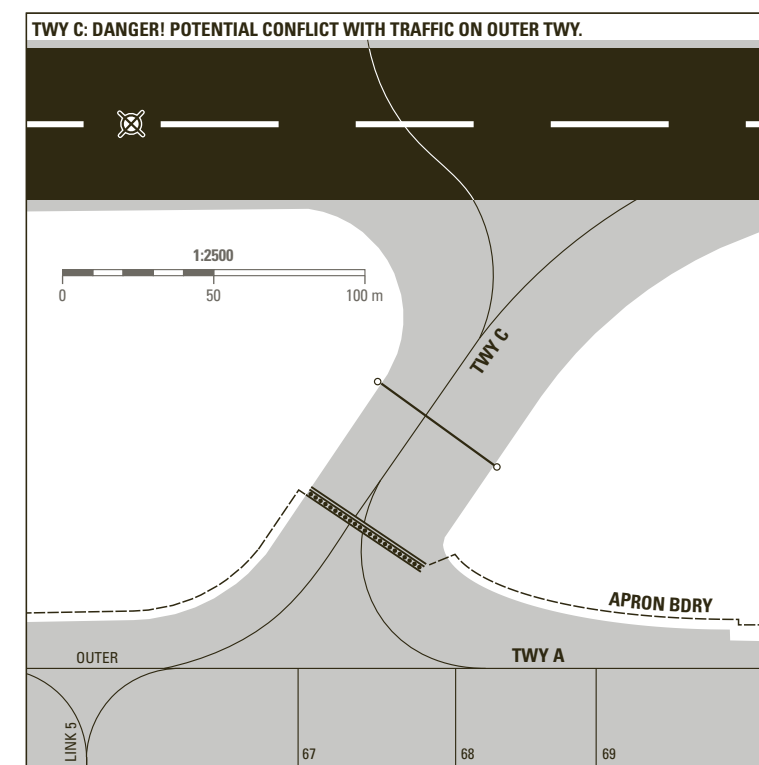


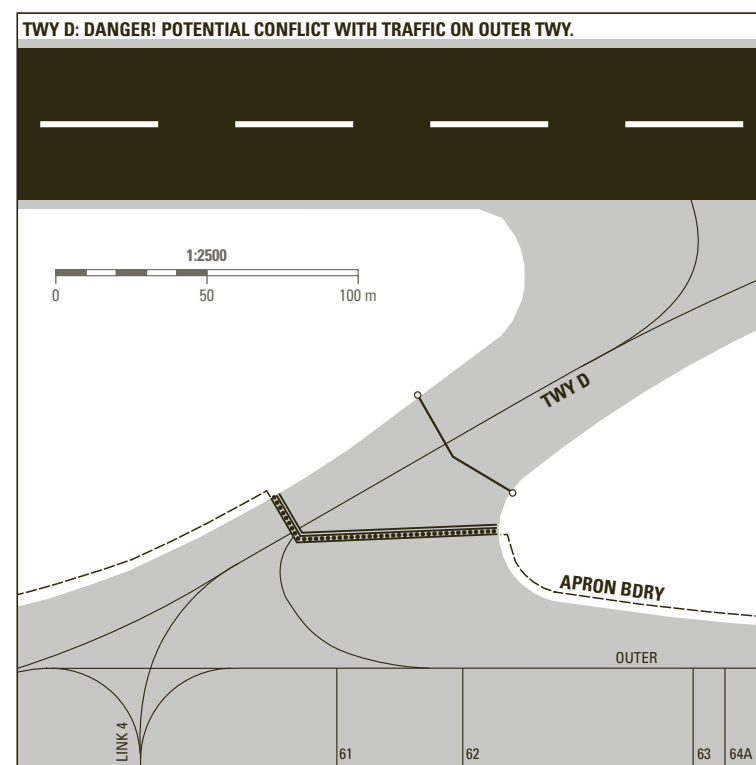

HOT SPOTS

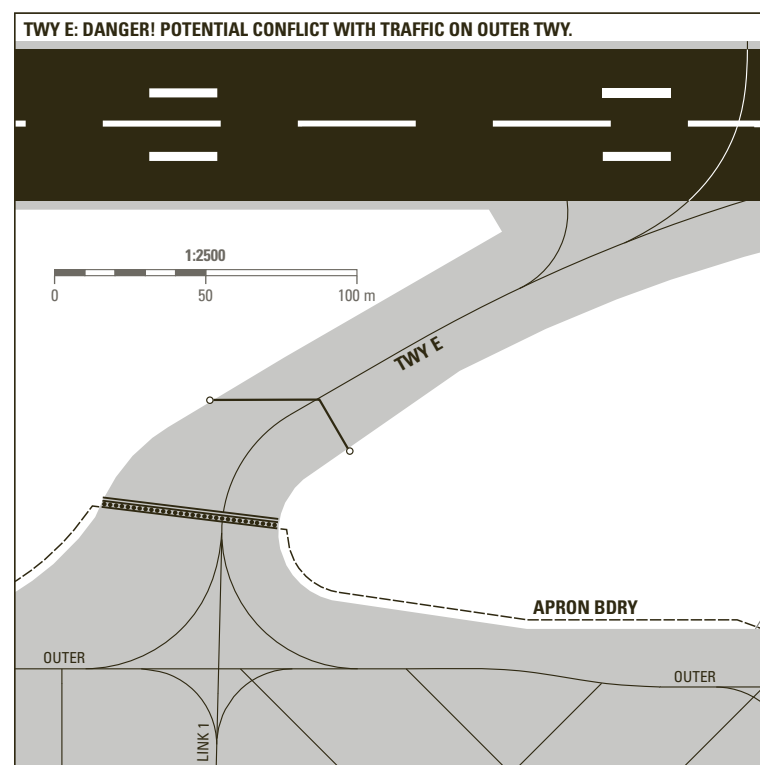

TWY LGT	
EDGE	Apron area, RWY-Exits, TWY curves
CL	A, B, D, E, G, OUTER, INNER, LINK 0, 1, 2, 3, 4, 5, HLDG bays A and G. Partially installed on Q, P, HLDG bays Q and P
RETIL	B, D and E
RGL	A*, B, C, D, E, F, G*, P, Q - *Across TWY

Arrivals:

Arrivals:
PSN equipped with/without visual docking guidance system ➡ LSGG AD 2.9
The appropriate stop line - 1, 2 or 3 - at the ACFT stand will be transmitted
by Geneva APRON.

Push back procedure $\Rightarrow$ LSGG AD 2.20

ATIS	135.580
DEL	121.680
APRON SOUTH	121.855
TWR	118.700



RWY
Incursion
HOTSPOT

ACFT taxiing on TWY Q or P
southbound: Be aware of RWY AHEAD.

———— Guideline for taxiing

HLDG position CAT 1

ALDG position CAT I

Stop bar LGI CAT II-III

Stop bar LGT CA

≡≡≡ Stop bar LGT CA

On apron, wing tip clearance is provided only if ACFT main gear center remains over the guidelines.
When RWY 22 is in use: ACFT shall not use TWY CHARLIE unless otherwise instructed by TWR. If instructed to vacate via TWY CHARLIE, ACFT shall clear the RWY and hold on TWY CHARLIE remaining clear of OUTER TWY.

The TWY system south of the RWY fulfills ACFT code letter E operations (MAX wing span 65.0 m)

Exceptions and particularities are listed $\Rightarrow$ AD 2.8 § 5.

COR: Construction Area (WEF 27NOV2025)

THIS PAGE INTENTIONALLY LEFT BLANK