VAR 3°E (2020.5)

PROFILE see LSZH AD 2.24.4-4

RWY: 28

RWY 10	DECLARED DISTANCES in m	RWY 28
—	TAKE-OFF RUN AVAILABLE	**2500**
—	TAKE-OFF DISTANCE AVAILABLE	**2560**
—	ACCELERATE STOP DISTANCE AVAILABLE	**2500**
2500	LANDING DISTANCE AVAILABLE	—

500 m 0 1000 2000 m
1000 ft 0 3000 6000 ft
HORIZONTAL SCALE 1:20 000

CWY 60 m
10
28
273°
ASPHALT 2500 x 60 m
0
5696 m
723 m
R=2300 m
18°
N

583.5 (29) 573 (28) 572 (27)
501 (22) 499.5 (21) 496.5 (20) 494.5 (19) 490.5 (16) 484 (12) 472 (10)
438 (4) 437 (3) 437 (2)
431.5 (1) 443 (5) 446 (6) 446.5 (7) 456.5 (8) 463 (9) 483 (11) 487 (13) 488 (14) 489 (15) 490.5 (17) 492.5 (18)
518.5 (23) 540 (24) 550 (25) 552 (26)

OBST *ELEV in m*
AD *ELEV in m*
ORDER OF ACCURACY ACCORDING TO ICAO REQUIREMENTS

LEGEND
- (1) Identification number
- Tree, shrub
- Pole, tower, spire, antenna, etc.
- Building, large structure
- Transmission line, overhead cable
- Terrain penetrating obstacle plane

AMDT RECORD		
No.	DATE	ENTERED BY

© swisstopo

COR: editorial (WEF 20MAR2025)

VAR 3°E (2020.5)

Plan view see LSZH AD 2.24.4-3

PROFILE RWY: 28

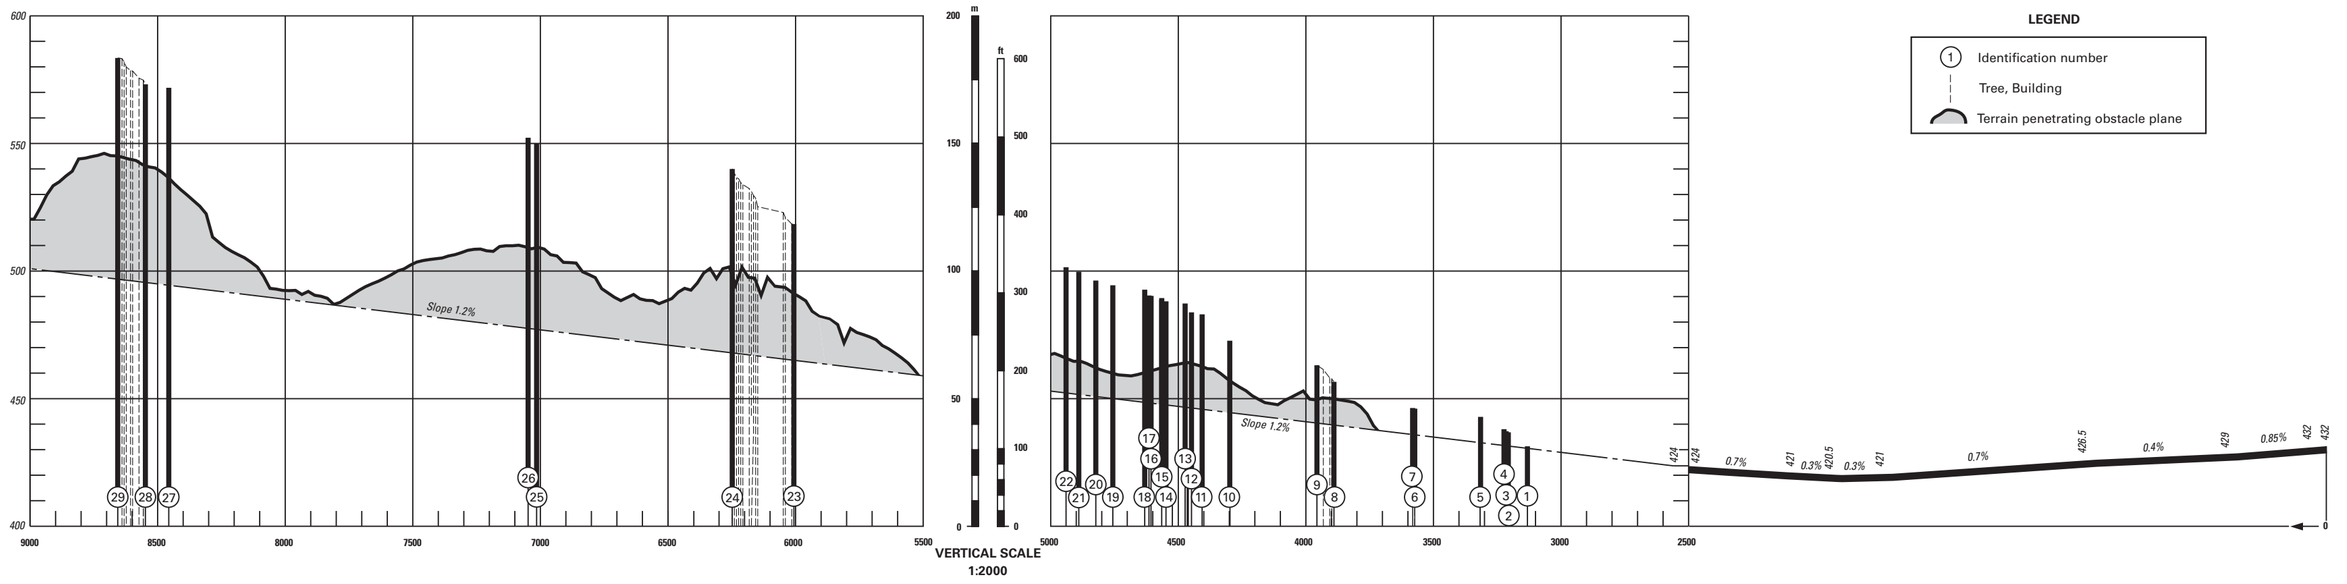

VERTICAL SCALE
1:2000

LEGEND

- (1) Identification number
- Tree, Building
- Terrain penetrating obstacle plane

COR: editorial (WEF 20MAR2025)

© swisstopo