


SION LSGS
IGS RWY 25 (ACFT CAT A/B/C)
OFFSET 6.5° RIGHT
GLIDE PATH 6.0°. VISUAL PART 4.0°

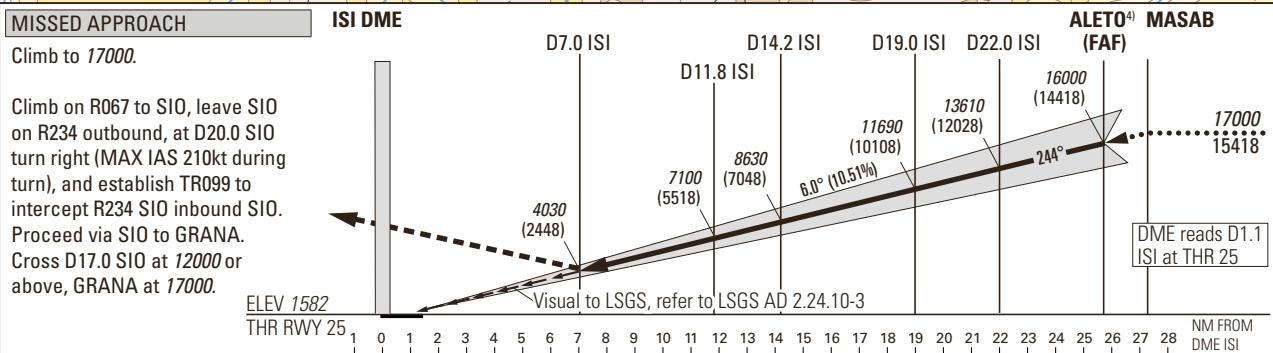

Missed APCH climb gradient requirement	STRAIGHT-IN APPROACH						VIS m	DIST ISI	7	8	9	10	12	14	16
	A		B		C			DIST THR	5.9	6.9	7.9	8.9	10.9	12.9	14.9
	DECISION ALTITUDE (HEIGHT)							ALT FT	4030	4670	5310	5950	7220	8500	9780
2.5%	6520 (4940) ¹⁾						5000	DIST ISI	18	20	22	24	25	25.7	27.3
3.0%	6080 (4500) ¹⁾							DIST THR	16.9	18.9	20.9	22.9	23.9	24.6	26.2
3.5%	5650 (4070) ¹⁾							ALT FT	11050	12330	13610	14890	15530	16000	17000
4.0%	5220 (3640) ¹⁾							REMARK							
4.5%	4780 (3200) ¹⁾							- APCH PROHIBITED IF GP U/S. - Table for temperature deviation from ISA. See LSGS AD 2.23.2. - Final APCH offset 6.5° from RCL. - If unable to comply with MAX HLDG speed, inform ATC.							
4.9%	4490 (2910) ¹⁾														
Circling north of AD only ^{1) 2) 3)}	3400 (1820)		5040 (3460)		6060 (4480)		5000	CAUTION							
ROD	GS kt	90	110	130	150			- This is not a standard APCH angle. - 3.8 NM BFR THR 25 Visual Segment Surface (VSS) penetrated by OBST up to 4370ft AMSL.							
	FT/MIN	958	1171	1384	1597			NOTE							

¹⁾ Special training required. ²⁾ Night circling prohibited. ⁴⁾ At ALETO, GP 15970.
³⁾ ACFT categories A, B with speed limit of 125kt and C with speed limit of 135kt.

THIS PAGE INTENTIONALLY LEFT BLANK