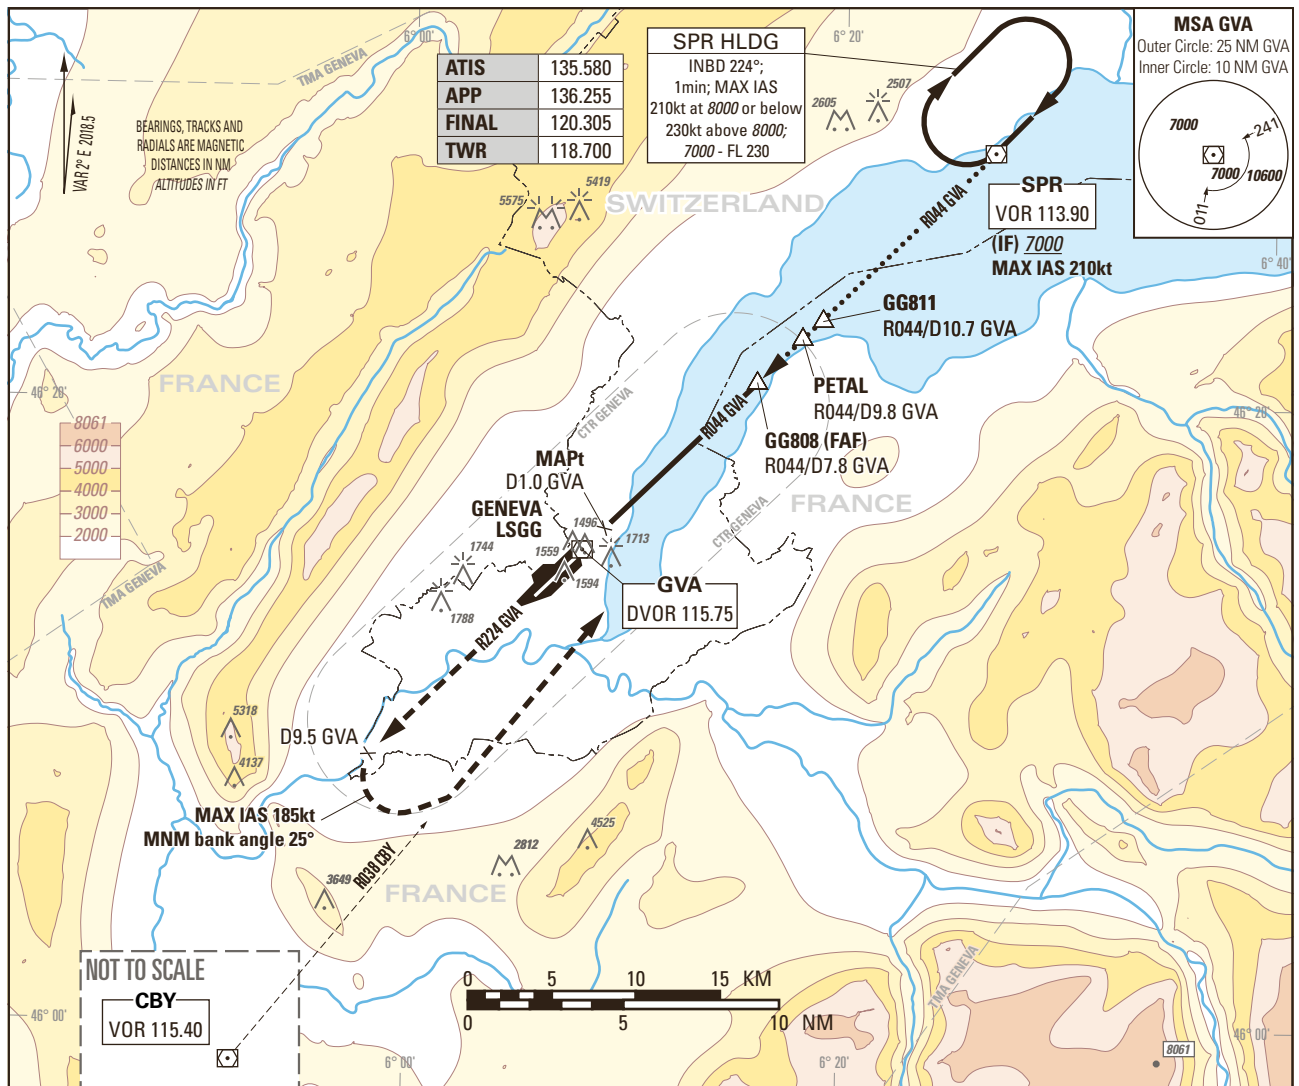



Instrument Approach Chart
(IAC) - ICAO

AD ELEV 1411ft

TRANSITION LEVEL by ATC
TRANSITION ALTITUDE 7000GENEVA LSGG
VOR RWY 22**MISSED APPROACH**

Initial climb clearance 7000.

Climb straight ahead on RWY axis. Follow R224 GVA. At D9.5 GVA past the station, turn left to intercept R038 CBY (MAX IAS 185kt, MNM bank angle 25°). Proceed to SPR.

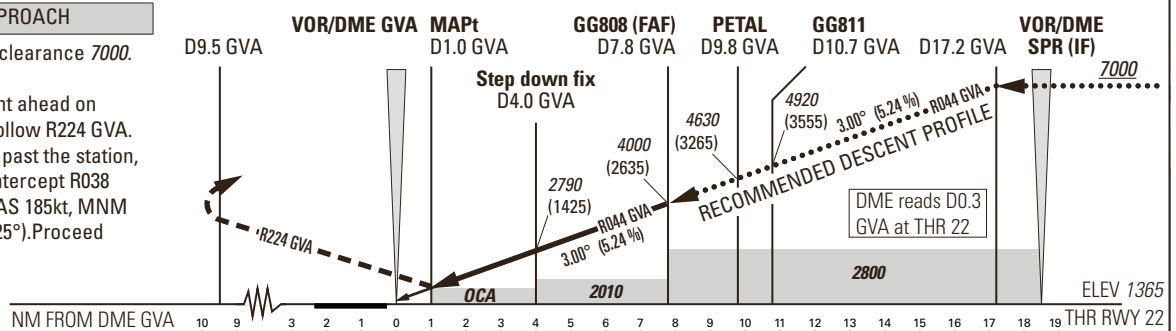

OBSTACLE CLEARANCE ALTITUDE (HEIGHT)		Missed APCH climb gradient		A		B		C		D		ROD		GS kt		90		110		130		150									
														FT/MIN		478		584		690		796									
Straight-in approach ¹⁾		2.5%		2070 (705)																											
		2.8% to 4500		1830 (465)																											
Circling ^{2) 3)}				2100 (689)						2400 (989)																					
DIST DME GVA		2	4	6	8	10	12	14	16	NOTE																					
recommended crossing ALTITUDE (HEIGHT)		2150 (785)	2790 (1425)	3430 (2065)	4060 (2695)	4700 (3335)	5340 (3975)	5970 (4605)	6610 (5245)	¹⁾ Above THR elevation 1365ft, MAPt at 1.3NM THR22 (1.0NM DME GVA). ²⁾ Above aerodrome ELEV 1411ft, circling on request of ATC																					

COR: MSA (WEF 28MAR2019)

NOTE

¹⁾ Above THR elevation 1365ft, MAPt at 1.3NM THR22 (1.0NM DME GVA).

²⁾ Above aerodrome ELEV 1411ft, circling on request of ATC under special conditions and north of RWY only, speed and radius for category D as for category C aircraft.

³⁾ Circling must remain inside CTR at all times.

THIS PAGE INTENTIONALLY LEFT BLANK