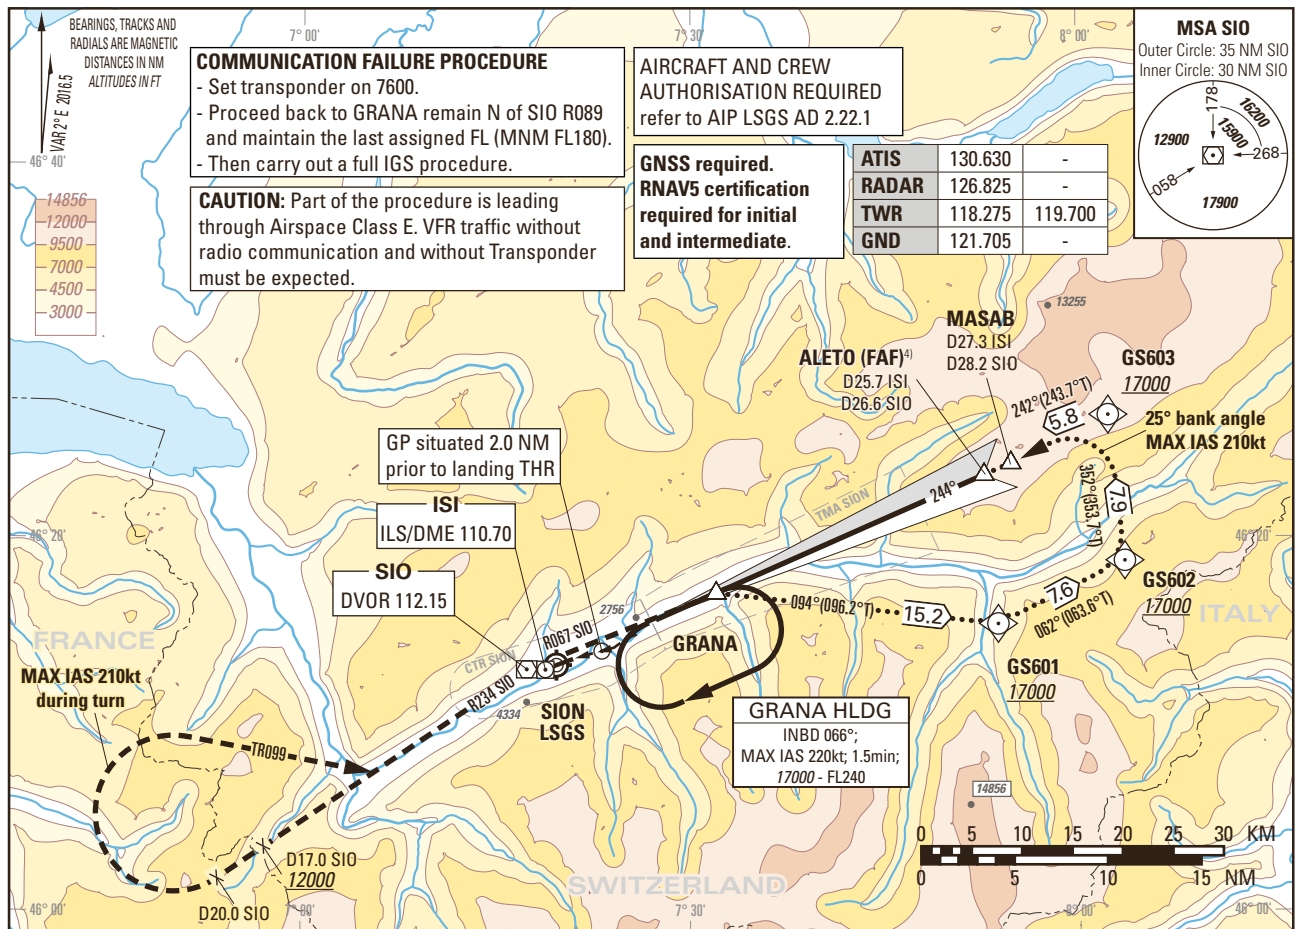


Instrument Approach Chart
(IAC) - ICAO
(IGS instruction: see LSGS AD 2.22)

AD ELEV 1582ft


TRANSITION LEVEL by ATC
TRANSITION ALTITUDE 17000

SION LSGS
IGS RWY 25 (ACFT CAT A/B/C)
OFFSET 6.5° RIGHT
GLIDE PATH 6.0°, VISUAL PART 4.0°

**MISSED APPROACH**

Climb to 17000.

Climb on R067 to SIO, leave SIO on R234 outbound, at D20.0 SIO turn right (MAX IAS 210kt during turn), and establish TR099 to intercept R234 SIO inbound SIO. Proceed via SIO to GRANA. Cross D17.0 SIO at 12000 or above, GRANA at 17000.

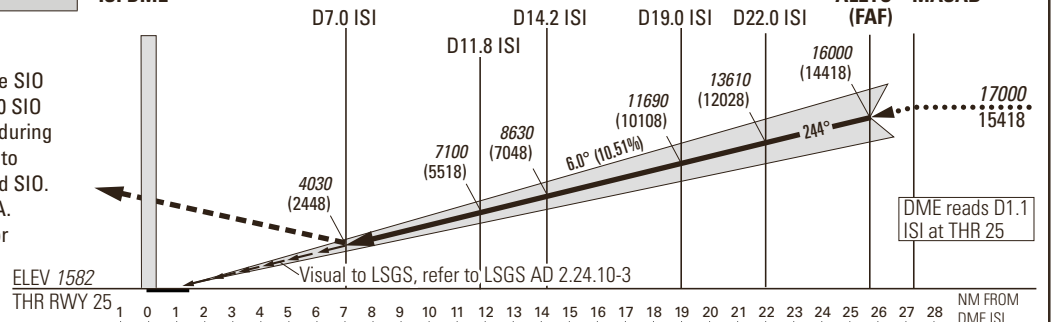ISI DME

Missed APCH climb gradient requirement		STRAIGHT-IN APPROACH					VIS m	DISTANCE									
		A		B		C		DIST ISI		7	8	9	10	12	14	16	
		DECISION ALTITUDE (HEIGHT)						DIST THR		5.9	6.9	7.9	8.9	10.9	12.9	14.9	
2.5%		6520 (4940) ¹⁾					5000	ALT FT		4030	4670	5310	5950	7220	8500	9780	
3.0%		6080 (4500) ¹⁾						DIST ISI		18	20	22	24	25	25.7	27.3	
3.5%		5650 (4070) ¹⁾						DIST THR		16.9	18.9	20.9	22.9	23.9	24.6	26.2	
4.0%		5220 (3640) ¹⁾						ALT FT		11050	12330	13610	14890	15530	16000	17000	
4.5%		4780 (3200) ¹⁾						REMARK									
4.9%		4490 (2910) ¹⁾					5000	- APCH PROHIBITED IF GP U/S. - Table for temperature deviation from ISA. See LSGS AD 2.23.2. - Final APCH offset 6.5° from RCL. - If unable to comply with MAX HLDG speed, inform ATC.									
Circling north of AD only ^{1) 2) 3)}		3400 (1820)		5040 (3460)		6060 (4480)		CAUTION									
ROD		GS kt	90	110	130	150		- This is not a standard APCH angle. - 3.8 NM BFR THR 25 Visual Segment Surface (VSS) penetrated by OBST up to 4370ft AMSL.									
		FT/MIN	958	1171	1384	1597	NOTE										

COR: TWR ALTN FREQ added (WEF 23MAR2023)

THIS PAGE INTENTIONALLY LEFT BLANK