Instrument Approach Chart
(IAC) - ICAO

AD ELEV 1417ft

TRANSITION LEVEL	by ATC
TRANSITION ALTITUDE	*7000*

ZURICH (LSZH)
LOC RWY 16

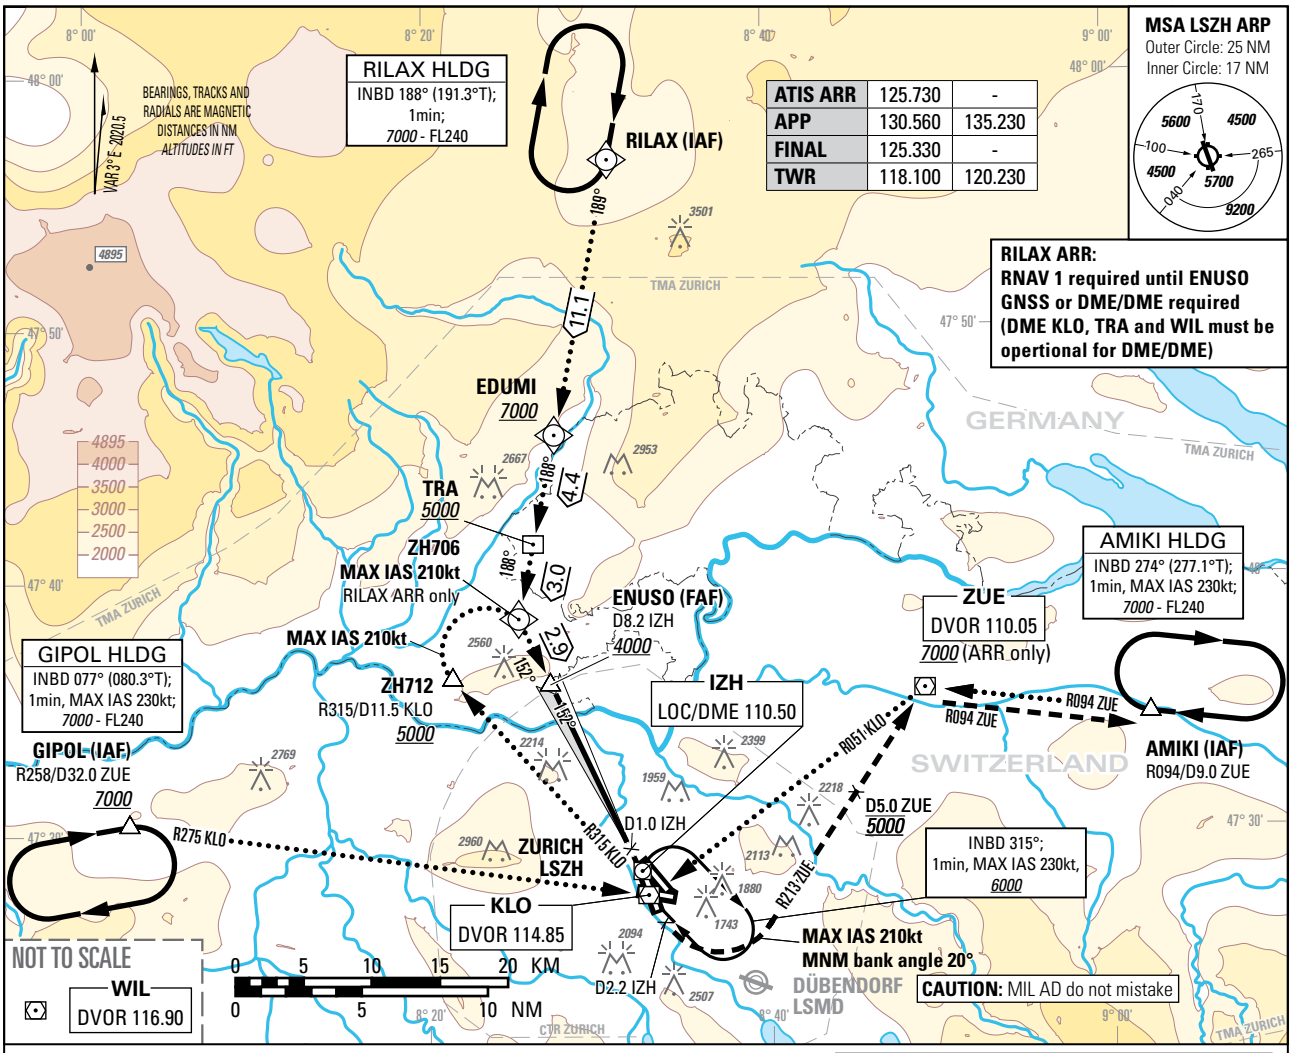

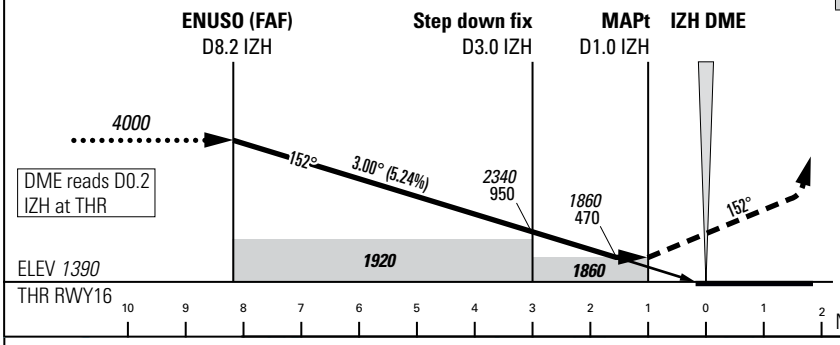

MISSED APPROACH

Initial climb clearance *5000*.

Climb straight ahead. At D2.2 IZH past the station, turn left (MAX IAS 210kt, MNM bank angle 20°). Intercept R213 ZUE. Cross D5.0 ZUE to the station at *5000*. At D5.0 ZUE to the station continue climb to *7000*. Proceed to ZUE. Cross ZUE at *6000* or above. At ZUE intercept R094 ZUE. Proceed to AMIKI. MNM climb gradient 4.2% up to *5000*, after passing D5.0 ZUE MNM climb gradient 3.9% up to *7000* due to ASP restrictions.

DIST DME IZH	8	7	6	5	4	3	2
recommended CROSSING ALT	*3950*	*3630*	*3310*	*2990*	*2670*	*2350*	*2030*
recommended CROSSING HGT	2560	2240	1920	1600	1280	960	640

ROD	GS kt	90	110	130	150
	FT/MIN	478	584	690	796

OBSTACLE CLEARANCE ALTITUDE (HEIGHT)	A	B	C	D
STRAIGHT-IN APPROACH	*1860* (470)			

COR: CTR &TMA LSZH, PBN box (WEF 20MAR2025)

THIS PAGE INTENTIONALLY LEFT BLANK