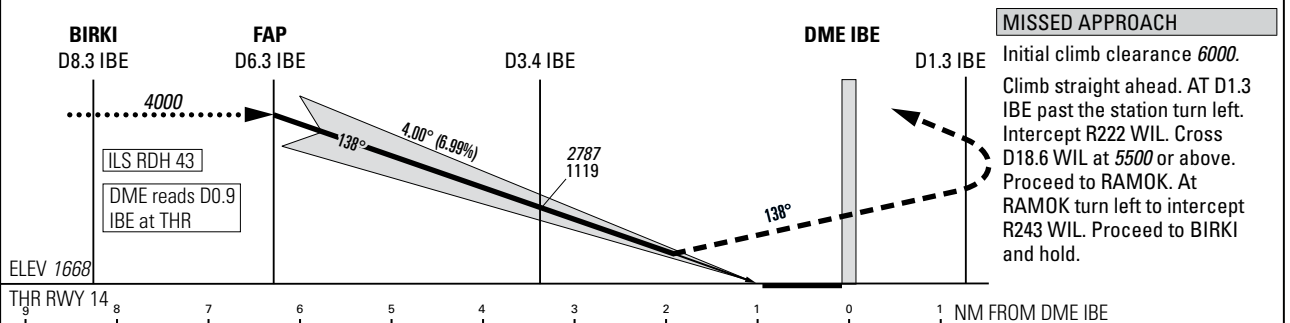
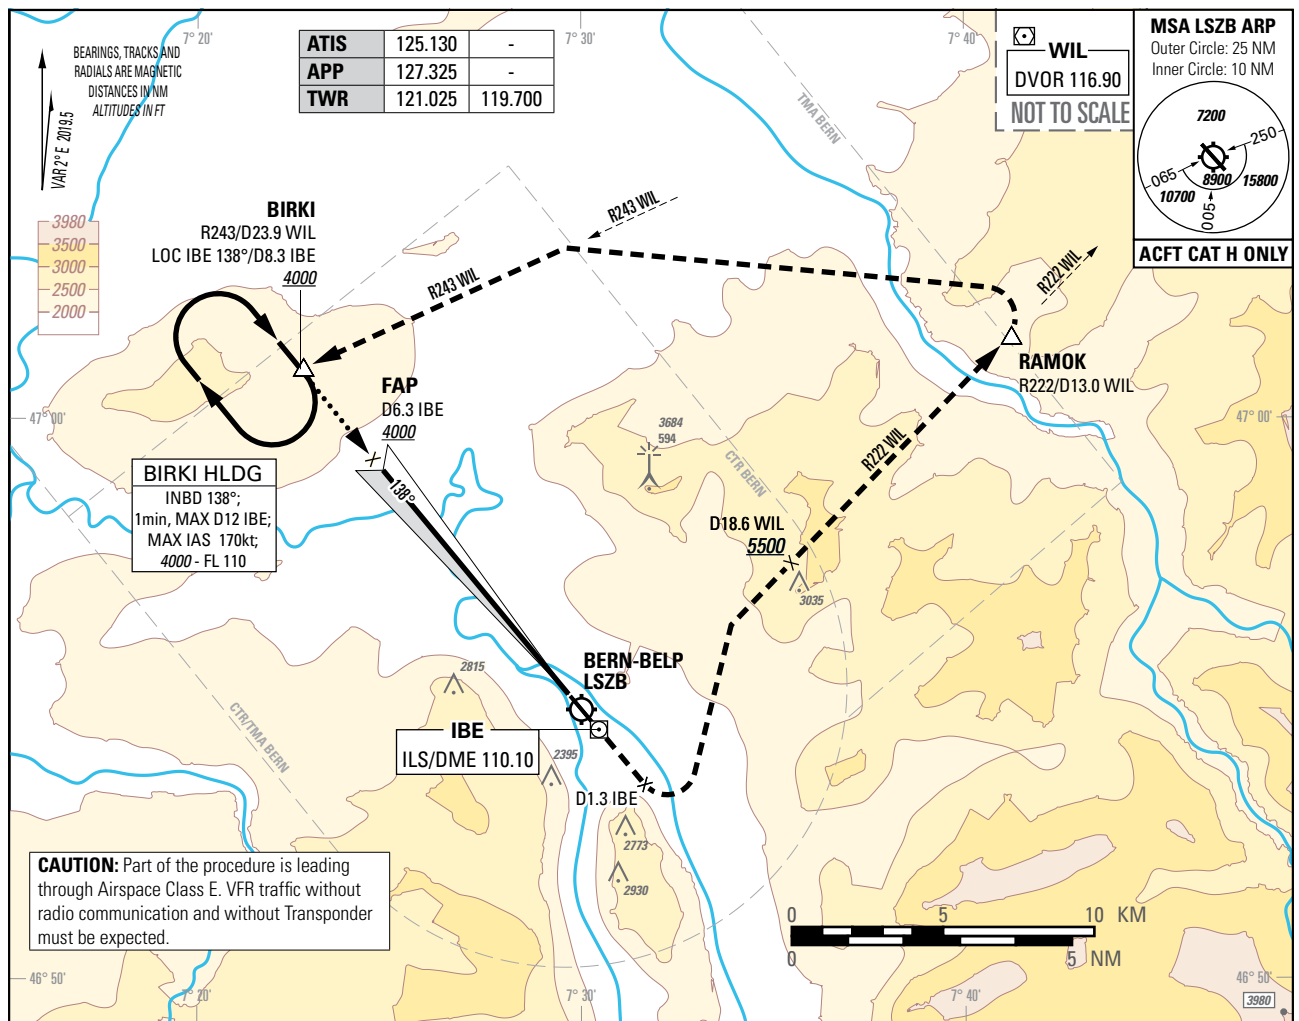


Instrument Approach Chart
(IAC) - ICAO

AD ELEV 1675ft

TRANSITION LEVEL by ATC
TRANSITION ALTITUDE 6000BERN-BELP (LSZB)
ILS RWY 14

Missed APCH climb gradient requirement			STRAIGHT-IN APPROACH				DME IBE								
			OBSTACLE CLEARANCE ALTITUDE (HEIGHT)				DIST THR	5.4	5.1	4.1	3.1	2.1	1.1	0.1	
			H				ALT FT	4000	3877	3452	3028	2603	-		
4.2%		pressure altimeter	2334 (666)				CAUTION - MAX GS 140kt in final APCH to avoid ROD >1000ft/min. - 0.7 NM BFR THR 14 Visual Segment Surface (VSS) penetrated by trees up to 1890ft AMSL. - This is not a standard APCH angle.								
5.0% up to 3100			2229 (561)												
7.0% up to 3100			2075 (407)												
			DECISION ALTITUDE (HEIGHT)				REMARK - Uncategorised ILS APCH RWY 14 due to OBST limitation and restriction according to non-instrument RWY criteria. - ILS14 signal fulfills ICAO Annex 10, CAT I specifications. - Circling according to specific APCH charts.								
4.2%		pressure altimeter	2334 (666)												
5.0% up to 3100			2229 (561)												
7.0% up to 3100			2117 (449)												
ROD	GS kt	90	110	130	140										
	FT/MIN	637	779	920	991										

GOB chart renaming (W55 20F5B2025)

COR: chart renaming (WEF 20FEB2025)

THIS PAGE INTENTIONALLY LEFT BLANK